

## 5% openness Mōrena FR Sunscreen


### Features

The 2 x 2 basketweave construction provides great stability and excellent vision out whilst controlling light, glare and heat. Selected colours are available in matching 5% and 10% openness.

### **Care Instructions**

Dusting with a feather duster is all that is required to keep your fabric looking good. Dirt and grime can be removed by simply wiping fabric skins with a sponge soaked in lukewarm water. If marks are still visible, add a little detergent. Then dry gently with a clean cloth.

## **Colour Options**

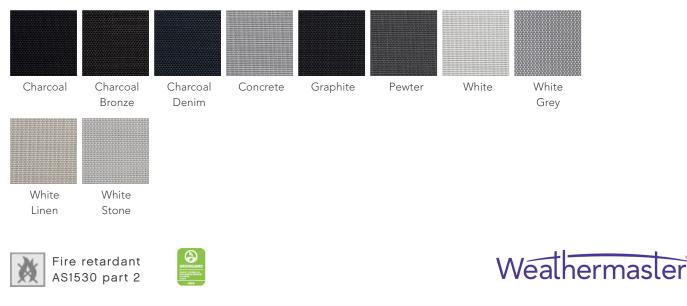

# 5% openness Morena FR Sunscreen

Technical information	
Fabric Density	Semi Transparent
Composition	PVC Coated Polyester Base, 2 x 2 basketweave
Weight	569gsm
Thickness	0.79mm
Width	3000mm
Colour Fastness	6 (Bluescale) Tested to ISO 105-B02:2014
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index: 5 Range [0-20]
Weave	2 x 2 Basketweave
Organic emissions (VOC)	Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11). Greenguard Gold Accredited
Product Options	Roller Blinds

Fabric colour	Graphite	Pewter	Charcoal	Charcoal Denim	Charcoal Bronze
Optical/Light properties					
Visual Light Transmittance	8%	9%	7%	9%	8%
Openness factor (nominal)	5%	5%	5%	5%	5%
Heat/Solar properties					
Solar transmittance	9%	9%	7%	9%	8%
Solar reflectance	4%	12%	3%	5%	4%
Solar absorbance	87%	79%	90%	86%	87%
G-value / Solar heat gain coefficient					
Glazing Type - Single 3mm Clear Glass	0.75	0.70	0.75	0.74	0.75

For more information please contact New Zealand Window Shades on 0800 223 224 or http://www.weathermaster.co.nz/contact-us

#### Colour options presented with data specifications



New Zealand Window Shades Ltd. PO Box 64019, Botany, Auckland 2163, New Zealand Weathermaster® is a division of New Zealand Window Shades Ltd. ©Copyright 2021 New Zealand Window Shades Ltd.



Fire retardant AS1530 part 2

θ



# 5% openness Morena FR Sunscreen

## Technical information

Fabric Density	Semi Transparent
Composition	PVC Coated Polyester Base, 2 x 2 basketweave
Weight	569gsm
Thickness	0.79mm
Width	3000mm
Colour Fastness	6 (Bluescale) Tested to ISO 105-B02:2014
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index: 5 Range [0-20]
Weave	2 x 2 Basketweave
Organic emissions (VOC)	Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11). Greenguard Gold Accredited
Product Options	Roller Blinds

Fabric colour	White	White Linen	White Grey	White Stone	Concrete
Optical/Light properties					
Visual Light Transmittance	17%	14%	11%	12%	9%
Openness factor (nominal)	5%	5%	5%	5%	5%
Heat/Solar properties					
Solar transmittance	21%	19%	13%	16%	12%
Solar reflectance	66%	58%	42%	56%	45%
Solar absorbance	13%	23%	45%	28%	43%
G-value / Solar heat gain coefficient					
Glazing Type - Single 3mm Clear Glass	0.34	0.40	0.50	0.41	0.48

For more information please contact New Zealand Window Shades on 0800 223 224 or http://www.weathermaster.co.nz/contact-us

#### Colour options presented with data specifications



New Zealand Window Shades Ltd. PO Box 64019, Botany, Auckland 2163, New Zealand Weathermaster® is a division of New Zealand Window Shades Ltd. ©Copyright 2021 New Zealand Window Shades Ltd.



Fire retardant AS1530 part 2



April 2021