

# Extraview

## 5% openness Extraview Sunscreen


### Features

Extraview fabric is a high-quality solar protection fabric with a 1 x 2 basket weave construction. With a 5% openness factor this sunscreen provides a level of daytime privacy and UV control.

### Care Instructions

Dusting with a feather duster is all that is required to keep your fabric looking good. Dirt and grime can be removed by simply wiping fabric skins with a sponge soaked in lukewarm water. If marks are still visible, add a little detergent. Then dry gently with a clean cloth.

### Colour Options



Charcoal

Charcoal  
Grey

Charcoal  
Lotus

Charcoal  
Sable

Pearl

Pearl  
Linen

White  
Pearl

White  
Linen



White  
Stone

White



Fire retardant  
AS1530 part 2



Weathermaster®

# Extraview 5% openness Sunscreen


## Technical information

Fabric Density	Semi Transparent
Composition	36% FibreGlass, 64% PVC
Weight	400gsm $\pm$ 5%
Thickness	0.52mm $\pm$ 10%
Width	3100mm
Colour Fastness	6-7 (AS 2001.4.21)
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index: 1 Range [1-20]
Weave	2 x 1 Basketweave
Organic emissions (VOC)	Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11).
Product Options	Roller Blinds

Fabric colour	Charcoal	Charcoal Grey	Charcoal Lotus	Charcoal Sable	Pearl
Optical/Light properties					
Visual Light Transmittance	3%	5%	5%	5%	7%
Openness factor (nominal)	5%	5%	5%	5%	5%
Heat/Solar properties					
Solar transmittance	3%	6%	6%	6%	10%
Solar reflectance	4%	8%	14%	13%	33%
Solar absorbance	93%	86%	80%	81%	57%
G-value / Solar heat gain coefficient					
Glazing Type - Single 3mm Clear Glass	0.69	0.67	0.64	0.64	0.53

For more information please contact New Zealand Window Shades on 0800 223 224 or <http://www.weathermaster.co.nz/contact-us>

## Colour options presented with data specifications

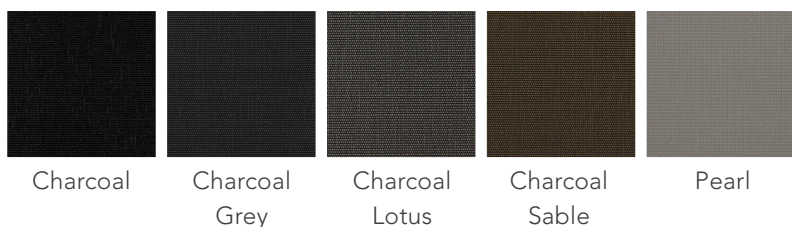

New Zealand Window Shades Ltd.  
PO Box 12 785, Penrose, Auckland 1642, New Zealand  
Weathermaster® is a division of New Zealand Window Shades Ltd.  
©Copyright 2021 New Zealand Window Shades Ltd.



Fire retardant  
AS1530 part 2

Weathermaster®

# Extraview 5% openness Sunscreen

## Technical information

Fabric Density	Semi Transparent
Composition	36% FibreGlass, 64% PVC
Weight	400gsm $\pm$ 5%
Thickness	0.52mm $\pm$ 10%
Width	3100mm
Colour Fastness	6-7 (AS 2001.4.21)
Flame Retardancy	Independently tested to AS1530 part 2. Flammability Index: 1 Range [1-20]
Weave	2 x 1 Basketweave
Organic emissions (VOC)	Does not exceed the maximum VOC (Volatile Organic Compound) criteria specified by the Green Building Council of Australia (IEQ-11).
Product Options	Roller Blinds

Fabric colour	Pearl Linen	White Pearl	White Linen	White Stone	White
Optical/Light properties					
Visual Light Transmittance	9%	12%	15%	18%	16%
Openness factor (nominal)	5%	5%	5%	5%	5%
Heat/Solar properties					
Solar transmittance	12%	15%	19%	21%	19%
Solar reflectance	39%	52%	61%	61%	71%
Solar absorbance	49%	33%	20%	18%	10%
G-value / Solar heat gain coefficient					
Glazing Type - Single 3mm Clear Glass	0.50	0.43	0.38	0.38	0.32

For more information please contact New Zealand Window Shades on 0800 223 224 or <http://www.weathermaster.co.nz/contact-us>

## Colour options presented with data specifications

				
Pearl Linen	White Pearl	White Linen	White Stone	White

New Zealand Window Shades Ltd.  
PO Box 12 785, Penrose, Auckland 1642, New Zealand  
Weathermaster® is a division of New Zealand Window Shades Ltd.  
©Copyright 2021 New Zealand Window Shades Ltd.



Fire retardant  
AS1530 part 2

Weathermaster®